



1762 #2

Please type a plus sign (+) inside this box → ☐Approved for use through 10/31/2002. OMB 0651-0031
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.


TRANSMITTAL FORM (to be used for all correspondence after initial filing)	Application Number	09/814,331	
	Filing Date	March 21, 2001	
	First Named Inventor	Kong Fok Chong	
	Group Art Unit	1762	
	Examiner Name	Not Yet Assigned	
Total Number of Pages in This Submission	29	Attorney Docket Number	21046.P007

ENCLOSURES (check all that apply)		
<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Assignment Papers (for an Application)	<input type="checkbox"/> After Allowance Communication to Group
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment / Reply	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address	<input checked="" type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Terminal Disclaimer	1. Return Receipt Postcard
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> Request for Refund	RECEIVED JUL 12 2001 TC 1700 MAIL ROOM
<input checked="" type="checkbox"/> Certified Copy of Priority Document(s)	<input type="checkbox"/> CD, Number of CD(s) _____	
<input type="checkbox"/> Response to Missing Parts/Incomplete Application	Remarks	
<input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53		

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual name	Aloysius T.C. AuYeung, Reg. No. 35,432 COLUMBIA IP LAW GROUP, PC
Signature	
Date	July 5, 2001

CERTIFICATE OF MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, Washington, DC 20231 on this date: 7/5/2001	
Typed or printed name	Michelle J. Turner
Signature	
Date	7/5/2001

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



**REGISTRY OF PATENTS
SINGAPORE**

This is to certify that the annexed is a true copy of the following Singapore patent application as filed in this Registry.

Date of Filing : 21 MARCH 2000

Application Number : 200001595-8

Applicant(s) : NANYANG POLYTECHNIC

Title of Invention : PLASTIC COMPONENTS WITH
IMPROVED SURFACE APPEARANCE
AND METHOD OF MAKING THE SAME

RECEIVED
JUL 12 2001
TC 1700 MAIL ROOM


CHIG KAM TACK
Assistant Registrar
for REGISTRAR OF PATENTS
SINGAPORE

PATENTS FORM 1

**SECOND SCHEDULE
SINGAPORE
THE PATENTS ACT
(CHAPTER 221)**

Rule 19

The Registrar of Patents
Registry of Patents

THE PATENTS RULE**REQUEST FOR THE GRANT OF A PATENT**




THE GRANT OF A PATENT IS REQUESTED BY THE UNDERSIGNED ON THE BASIS OF
THE PRESENT APPLICATION.

I. Title of Invention	PLASTIC COMPONENTS WITH IMPROVED SURFACE APPEARANCE AND METHOD OF MAKING THE SAME			
II. Applicant(s) (See note 2)	(a) Name		NANYANG POLYTECHNIC	
	Body Description/		A body corporate established under the NYP Act (Chapter 191A) on 1 April 1992	
	Residency		SINGAPORE	
	Street Name & Number		180 ANG MO KIO AVE. 8	
	City		SINGAPORE 569830	
	State		SINGAPORE	
	Country		SINGAPORE	
	(b) Name			
	Body Description/			
	Residency			
	Street Name & Number			
	City			
	State			
	Country			
	(c) Name			
	Body Description/			
	Residency			
	Street Name & Number			
	City			
	State			
	Country			
III. Declaration of priority (see note 3)	Country/Country Designated		File no.	
	Filing Date			
	Country/Country Designated		File no.	
	Filing Date			
	Country/Country Designated		File no.	
	Filing Date			

SECOND SCHEDULE - continued

IV. Inventors (See note 4)	<table> <tr> <td data-bbox="781 296 846 352"><input type="checkbox"/></td> <td data-bbox="948 306 997 338">Yes</td> <td data-bbox="1114 289 1179 352"><input checked="" type="checkbox"/></td> <td data-bbox="1295 306 1344 338">No</td> </tr> <tr> <td data-bbox="781 384 846 447"><input checked="" type="checkbox"/></td> <td data-bbox="948 401 997 432">Yes</td> <td data-bbox="1114 380 1179 443"><input type="checkbox"/></td> <td data-bbox="1295 401 1344 432">No</td> </tr> </table>				<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No									
<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No									
V. Name of Agent (if any) (See note 5)	Jaqueline Lui of LAWRENCE Y D HO & ASSOCIATES											
VI. Address for Service (See note 6)	Block/Hse No.	30	Level No.	7								
	Unit No/PO Box	01	Postal Code	229922								
	Street Name	Bideford Road										
	Building Name	Thongsia Building										
VII. Claiming an earlier filing date under section 20(3), 26(6) or 47(4). (See note 7)	Application No											
	Filing Date											
	[Please tick in the relevant space provided]: () Proceeding under rule 27(1)(a). Date on which the earlier application was amended = _____ Or () Proceeding under rule 27(1)(b)											

THIRD SCHEDULE - continued

<p>VIII. Invention has been displayed at an International Exhibition (See note 8)</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No </div>															
<p>IX. Section 114 requirements (See note 9)</p>	<p>The invention relates to and/or used a micro-organism deposited for the purposes of disclosure in accordance with section 114 with a depositary authority under the Budapest Treaty.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No </div>															
<p>X. Check List (To be filled in by applicant or agent)</p>	<p>A. The application contains the following number of sheet(s):-</p>															
	<p>1. Request</p> <p>2. Description</p> <p>3. Claim(s).</p> <p>4. Drawing(s).</p> <p>5. Abstract.</p>	<table border="1"> <tr> <td style="text-align: center;">4</td> <td>sheets</td> </tr> <tr> <td style="text-align: center;">15</td> <td>sheets</td> </tr> <tr> <td style="text-align: center;">4</td> <td>sheets</td> </tr> <tr> <td style="text-align: center;">3</td> <td>sheets</td> </tr> <tr> <td style="text-align: center;">1</td> <td>sheets</td> </tr> </table>	4	sheets	15	sheets	4	sheets	3	sheets	1	sheets				
		4	sheets													
15		sheets														
4		sheets														
3		sheets														
1	sheets															
<p>B. The application as filed is accompanied by:-</p>																
<p>1. Priority document</p> <p>2. Translation of priority document</p> <p>3. Statement of Inventorship & right to grant</p> <p>4. International Exhibition Certificate</p>	<table border="1"> <tr><td style="height: 30px;"></td></tr> <tr><td style="height: 30px;"></td></tr> <tr><td style="text-align: center;">X</td></tr> <tr><td style="height: 30px;"></td></tr> </table>			X												
	X															
<p>X. Signature(s) (See note 10)</p> <table border="1"> <tr> <td data-bbox="602 1451 824 1528">Applicant (a)</td> <td colspan="2" data-bbox="824 1451 1435 1528" rowspan="2">  </td> </tr> <tr> <td data-bbox="602 1528 824 1612">Date</td> <td data-bbox="824 1528 1435 1612"> <div style="display: flex;"> <div style="flex: 1;">Mar 21, 2000</div> <div style="flex: 1; background-color: black;"></div> </div> </td> </tr> <tr> <td data-bbox="602 1612 824 1738">Applicant (b)</td> <td colspan="2" data-bbox="824 1612 1435 1738" rowspan="2"></td> </tr> <tr> <td data-bbox="602 1738 824 1822">Date</td> <td data-bbox="824 1738 1435 1822"> <div style="display: flex;"> <div style="flex: 1;"></div> <div style="flex: 1; background-color: black;"></div> </div> </td> </tr> <tr> <td data-bbox="602 1822 824 1978">Applicant (c)</td> <td colspan="2" data-bbox="824 1822 1435 1978" rowspan="2"></td> </tr> <tr> <td data-bbox="602 1906 824 1978">Date</td> <td data-bbox="824 1906 1435 1978"> <div style="display: flex;"> <div style="flex: 1;"></div> <div style="flex: 1; background-color: black;"></div> </div> </td> </tr> </table>		Applicant (a)			Date	<div style="display: flex;"> <div style="flex: 1;">Mar 21, 2000</div> <div style="flex: 1; background-color: black;"></div> </div>	Applicant (b)			Date	<div style="display: flex;"> <div style="flex: 1;"></div> <div style="flex: 1; background-color: black;"></div> </div>	Applicant (c)			Date	<div style="display: flex;"> <div style="flex: 1;"></div> <div style="flex: 1; background-color: black;"></div> </div>
Applicant (a)																
Date			<div style="display: flex;"> <div style="flex: 1;">Mar 21, 2000</div> <div style="flex: 1; background-color: black;"></div> </div>													
Applicant (b)																
Date			<div style="display: flex;"> <div style="flex: 1;"></div> <div style="flex: 1; background-color: black;"></div> </div>													
Applicant (c)																
Date			<div style="display: flex;"> <div style="flex: 1;"></div> <div style="flex: 1; background-color: black;"></div> </div>													

SECOND SCHEDULE - continued

NOTES:

1. This form when completed, should be brought or sent to the Registry of Patents together with the prescribed fee and 3 copies of the description of the invention, and of any drawings.
2. Enter the name and address of each applicant in the spaces provided at paragraph II. Names of individuals should be indicated in full and the surname or family name should be underlined. The names of all partners in a firm must be given in full. The place of residence of each individual should also be furnished in the space provided. Bodies corporate should be designated by their corporate name and country of incorporation and, where appropriate, the state of incorporation within that country should be entered where provided. Where more than three applicants are to be named, the names and address of the fourth and any further applicants should be given on a separate sheet attached to this Form together with the signature of each of these further applicants.
3. The declaration of priority at paragraph III should state the date of the previous filing, the country in which it was made, and indicate the file number, if available. Where the application relied upon in an International Application or a regional patent application e.g. European patent application, one of the countries designated in that application [being one falling under the Patents (Convention Countries) Order] should be identified and the name of that country should be entered in the space provided.
4. Where the applicant or applicants is/are the sole inventor or the joint inventors, paragraph IV should be completed by marking the 'YES' Box in the declaration (a) and the 'NO' Box in the alternative statement (b). Where this is not the case, the 'NO' Box in declaration (a) should be marked and a statement will be required to be filed on Patents Form 8.
5. If the applicant has appointed an agent to act on his behalf, the agent's name should be indicated in the spaces available at paragraph V.
6. An address for service in Singapore to which all documents may be sent must be stated at paragraph VI. It is recommended that a telephone number be provided if an agent is not appointed.
7. When an application is made by virtue of section 20(3), 26(6) or 47(4), the appropriate section should be identified at paragraph VII and the number of the earlier application or any patent granted thereon identified.
8. Where the applicant wishes an earlier disclosure of the invention by him at an International Exhibition to be disregarded in accordance with section 14(4)(c), then the 'YES' box at paragraph VIII should be marked. Otherwise the 'NO' box should be marked.
9. Where in disclosing the invention the application refers to one or more micro-organisms deposited with a depository authority under the Budapest Treaty, then the 'YES' box at paragraph IX should be marked. Otherwise the 'NO' box should be marked.
10. Attention is drawn to rules 90 and 105 of the Patent Rules. Where there are more than three applicants, see also Note 2 above.
11. Applicants resident in Singapore are reminded that if the Registry of Patents considers that an application contains information the publication of which might be prejudicial to the defence of Singapore or the safety of the public, it may prohibit or restrict its publication or communication. Any person resident in Singapore and wishing to apply for patent protection in other countries must first obtain permission from the Singapore Registry of Patents unless they have already applied for a patent for the same invention in Singapore. In the latter case, no application should be made overseas until at least two months after the application has been filed in Singapore.

For Official Use

Application Filing Date: / /

Request received on : / /

Fee received on : / /

Amount :

*Cash/Cheque/Money Order No:

**Delete whichever is inapplicable*

**PLASTIC COMPONENTS WITH IMPROVED SURFACE
APPEARANCE AND METHOD OF MAKING THE SAME**

FIELD OF THE INVENTION

5 The present invention relates to the manufacture of plastic objects. In particular, the present invention relates to a method of treating porous plastic objects and products produced thereof.

BACKGROUND OF THE INVENTION

10 Plastic objects are commonly produced using rapid prototyping techniques for testing purposes before the more expensive permanent mold is made for mass production purposes. Different techniques and apparatus are available for producing rapid prototypes. The prototypes produced are typically made of metallic composites or plastic. For plastic
15 prototypes, acrylic, ABS and nylon are common materials used.

 Nylon prototypes are typically produced from powdered nylon using techniques such as selective laser sintering, while acrylic and ABS prototypes are produced by stereolithography and fused deposition method respectively. The prototypes produced have a high level of
20 accuracy, but often assume a rough, mat appearance that usually does not look like their injection moulded counterparts.

 Injection moulded plastic, on the other hand, may be produced with the relevant dyes added into the material for molding, and the high molding temperature and pressure causes complete melting and mixing of the
25 plastic and dye to form a non-porous, solid part. If texturing is desired of the

part, chemical etching or sanding is usually performed on the injection mold itself, such that the desired texture is automatically created on the surface of the mold during the molding process.

There is, however, presently no techniques to improve the appearance of parts produced by rapid prototyping technique (e.g. to provide surface texturing or colouring). It is therefore an object of the present invention to provide a method for improving the characteristics of porous plastic parts.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a flow chart to show the method according to the preferred embodiment of the present invention.

Figure 2 is a schematic diagram to show a prior art rapid prototyping process.

15 Figure 3A is schematic diagram to show surface unevenness of a rapid prototype due to the presence of miniature steps.

Figure 3B and 3C are schematic diagrams to show the same surface as Fig.3A but after treatment according to the prior art (Fig. 3B) or the present invention (Fig.3C).

20

SUMMARY OF THE INVENTION

Accordingly, the present invention provides, in one aspect, a method of treating the surface of a rough, plastic object to produce a high gloss, textured and/or coloured finish. Thus, a rapid prototype treated
25 according to the present method assumes the appearance of an injection

molded part, without the usual high costs associated with producing the injection mold. This allows greater flexibility for manufacturers producing products in which market acceptance is highly dependent on the appearance of the molded plastic part. With the present invention, manufacturers can now obtain plastic prototypes that closely resemble the final injection molded part, and therefore can obtain better market information before investing in the permanent molds for injection molding. This method may be applied to porous, semi-porous or non-porous prototypes.

The method according to the present invention overcome two main problems presented by porous prototypes. The first problem is porosity, which causes most surface coatings to penetrate and be absorbed below the surface, giving poor coating results. The second problem is roughness, due to the presence of miniature steps caused by the layer-by-layer fusion process. To overcome these problems, the present invention provides a first step of removing the pores in the porous part, at least at the outer layers of the part, followed by a smoothing process of filling the voids between the miniature steps with a hardener to give a smooth surface, on which further post-processing may be performed.

In the preferred embodiment, the pores are removed by infiltration of a curable polymer, such as polyurethane (PU). The infiltrated part is then cured under suitable curing conditions, followed by the application of a coating of a curable hardener, such as UV lacquer (a lacquer curable by exposure to ultraviolet light). The curable lacquer is then cured under appropriate conditions to give a smoothed surface. In the most preferred embodiment, an optional step of sanding is performed on the

smoothened surface to remove any residual unevenness, followed by spraying of a second lacquer to give a glossy look. The surface property of the prototype at this stage is similar to that of a smooth injection molded part. For coloured parts, spray painting may be performed. For textured parts, sanding is performed. For textured, coloured parts, a combination of sand-blasting and spray painting is performed.

The plastic product, constructed in accordance with the preferred embodiment, is made of a porous plastic part with its pore infiltrated with a reinforcement polymer or resin. The exterior surface of the product is coated with a hardener to provide a smooth surface on which standard surface finish techniques are further applied. The final products may have appearances ranging from mat, glossy, coloured to graphical prints that resemble injection molded products.

Besides providing a method for improving the finishing of a porous plastic part, the present invention also provides the unexpected benefit of increasing the strength and rigidity of the part. Thus, not only is it possible to improve the outward appearance of the rapid prototype, but the rigidity and tensile strength of the product produced according to the present invention is also improved.

The same methods as described above may be applied to treat semi-porous plastics. As for non-porous plastics, the appearance may be improved by performing the smoothing process of filling the voids between the miniature steps with a hardener to give a smooth surface on which further post-processing steps may be performed.

DESCRIPTION OF THE INVENTION

The following detailed description describes the preferred embodiment for implementing the underlying principles of the present invention. Specifically, a porous nylon prototype obtained by a standard rapid prototyping technique is used as an illustration of the application and usefulness of the present invention. One skilled in the art should understand, however, that the following description is meant to be illustrative of the present invention, and should not be construed as limiting the principles discussed herein. In the following discussion, and in the claims the terms "including", "having", "containing" and "comprising" are used in an open-ended fashion, and thus should be interpreted to mean "including but not limited to". Polymer, resin and hardener are used broadly to refer to liquid or semi-solid polymeric compounds that may be cured to form solidified or hardened structures. Specific examples of the types of polymer used in each step are described in detail below.

Referring to Figure 1, shows the general steps of the preferred embodiment of the present invention. Each step will be explained in greater detail below. It is appreciated that although the following specific examples describe a method of treating porous nylon rapid prototypes, the present invention may be applied to other porous plastics, particularly thermoplastics. The treatment of other rough, porous objects, that are not conducive to standard surface coating treatment, and the products derived thereof are also considered equivalents. Other non-porous plastics may also be treated according to an alternative embodiment of the present invention. It is also appreciated that once a smoothed part is obtained,

various surface treatments may be applied to obtain various appearances.

FABRICATION OF POROUS PLASTIC PART BY RAPID 5 PROTOTYPING

A porous plastic part may be obtained, for example, by a DTM Sinterstation using the technique of selective laser sintering (SLS). In this technique, as shown in Fig. 2, a laser beam 22 is traced over a thin layer of powder 24 made of a thermoplastic material such as nylon in the build
10 cylinder. The powder is spread by a roller 26 over the surface of a build cylinder 28. A piston 30 moves down one object layer thickness to accommodate the layer of powder. The powder is supplied to the build cylinder by the incremental upward movement of the powder delivery piston 32 and the rolling action of the roller 26. Heat from the laser melts
15 the powder where it strikes under the guidance scanner system 36. The CO₂ laser 34 provides a concentrated infrared heating beam 36. The entire fabrication chamber 38 is sealed and maintained at a specified temperature. Thus, heat from the laser need only elevate the temperature to cause sintering, greatly speeding up the process. A nitrogen
20 atmosphere is maintained in the fabrication chamber. After the part is fully formed, the fabrication piston 30 is raised to elevate the part. Excess powder from the build cylinder 28 is simply brushed and/or sanded away to obtain the raw part.

It is appreciated that the excess powder in the build chamber,
25 although not sintered to the part during the process, is exposed to high heat levels close to the melting temperature of the material. As a result, the

excess powder tend to lose part of its ability to fuse together properly to form the prototype and therefore are typically not recycled for successive uses. The part produced from recycled powder tends to be even more porous than parts produced by fresh powder. The post-processing (i.e. post-sintering) treatment according to the present invention, however, has the effect of reinforcing the part, thereby allowing recycling of excess powder.

REMOVAL OF POROSITY

The pores that cause the porosity of the plastic part are removed by infiltration of a curable polymer or resin that is of a suitable molecular weight to penetrate the pores effectively, and of the right characteristics to interact with the plastic material. The raw part is soaked in a container of curable polymeric liquid infiltrant that seals up the pores, at least on the surface of the part. Once sufficient infiltration has occurred, the part is removed from the container, and the infiltrant cured under suitable conditions. The length of soaking time depends on the amount of infiltration required. Thus, if complete infiltration is required to increase strength, then a longer period for soaking is needed for thicker parts. If only surface infiltration is required, then the soaking time may be shortened.

Table 1 below shows an example of how the infiltration step is performed. The surface of the infiltrated part, however, remains almost as rough as the raw part.

Material	TrueForm polyurethane (PU) Infiltrant supplied by Zeneca Resins, Massachusetts, USA.
Process	Submerge entire part into a container with the PU for 5-30 minutes. Place part in 60°C oven for 10- 20 minutes to cure the PU.
Resulting Part	Surface roughness (Ra) of 7- 10µm.

Table 1

SURFACE SMOOTHENING STEP

5 The SLS technique described above creates the rapid prototype parts through a layer by layer heating process. Thus, a part 42 with slopes or irregular shapes will contain miniature steps 44 as shown in Fig. 3A. Although each layer can be adjusted to as low as 0.1mm, the appearance of the raw part remains rough if post-processing is not performed. The

10 only post-processing method in the prior art to reduce this stepping effect is to sand down manually to form an even slope 46 as illustrated in Fig.3B. This takes time, and is only applicable on flat surfaces. i.e. stepping within the internal areas of the part cannot be removed easily. Sanding off also has the disadvantage of affecting the dimensions of the part.

15 Referring to Fig. 3C and in accordance with the present invention, a hardener 48 is provided to built up the surface of the part 42 to create a smooth surface, rather than to remove parts of the steps 44, as typically done in the prior art. This is achieved by filling the voids 50 between the steps to create a smooth slope. The hardener used to coat the surface of

the part should therefore be of sufficient viscosity to remain on the surface and to fill any depressions causing the roughness on the surface. An example of a suitable hardener is an epoxy mixture. The most preferred material is acrylate oligomer and multi-functional acrylate monomers cured by exposure to UV light. Table 2 below gives an example of how the smoothing step may be performed.

Hardener	80% UV lacquer Stargloss GLA 2298 in ethanol, obtained from SICPA Singapore Pte Ltd, Jurong, Singapore.
Process	The uncured hardener is layered onto the part by brushing. Curing: 10-60 seconds in the recommended UV-curing machine at 80w/cm ² or 3-5 hours under full sunlight
Resulting Part	Surface roughness (Ra) of 0.2-0.7µm

TABLE 2

The UV lacquer given in Table 2 produces a transparent, colorless coating of up to 0.1mm thick. Due to the thickness of the coating, the voids in the steps are filled. To produce a coloured part, an additional colour pigment, recommended for use with the same UV lacquer, may be added and cured as described above. No distortion or melting of the infiltrated part has been observed after undergoing the smoothing process.

SANDING

Although the UV lacquer produces a smoothened part, there is certain unevenness of thickness, particularly if brushing is used to apply the hardener. Thus, an optional sanding step is recommended. In the most preferred embodiment, sanding is performed with two grades of sand paper with a finer grade following a coarser grade. One example is grade 240 followed by 1200 for smoothened parts coated with the UV lacquer as described above. Sanding also helps to reduce the thickness caused by the hardener coating. A very smooth surface with surface roughness value (Ra) of 0.02 μ m may be obtained.

SPRAY LACQUER

The surface finish after sanding remains very dull. If a high glossy surface finish is desired, a second lacquer is sprayed onto the surface. Different types of common lacquer may be used, for example, TS-13 clear lacquer from Tamiya Corporation, Japan. The preferred method of application is by spraying with a fine nozzle spray gun, e.g. 0.3 to 0.5 mm nozzle size. The sprayed part is then allowed to air-dry. An alternative method is by brushing. Depending on the type of lacquer used, the surface roughness as a result of the spray lacquer step can increase by up to 0.8 μ m. Nevertheless, since the surface roughness has been substantially reduced during the smoothening and sanding steps, the increase in roughness contributed by the lacquer coating step is still within the range for surface finish of an injection molded glossy part.

COLORED FINISH

The surface finishing according to the present invention may be changed from transparent to other colours through various ways. These include :

1. Mixing suitable dyes into the UV lacquer (typically available from the same supplier) such that the colour is provided directly in hardener coating. e.g. Lablestar UV opaque yellow.
2. Mixing suitable dyes into the lacquer (typically available from the same supplier) such that the colour is provided in lacquer coating. e.g. Duplo Yellow Pigment from HEK GmbH.
3. Spray painting of commonly available paint using a fine nozzle spray Tamiya colour semigloss black with nozzle size of 0.3mm.

A combination of two or more of the above methods may also be used. After the spray painting process, other common processes, such as cubic printing (to give wood grain finish), Tampon printing or letter stanza transfer may be performed to provide graphics work.

SURFACE TEXTURING

If texturing is also desired for the finished part, techniques such as sand blasting may be performed on the high glossy part before or after the color finishing step. In an alternative embodiment, several layers of paint are sprayed onto the high glossy part to provide both the colour and the texture to the final surface.

Tables 3-5 contain examples to illustrate various combinations of techniques that can be used according to the present invention. Table 3 shows the process to produce a rapid prototype that meets the texture

MT-1055-2, according to Mold Tech Standard with a roughness (Rz) requirement of $16\mu\text{m}\pm 10\%$. The roughness (Rz) that was achieved by treating a sample through the process described in Table 3 was $14.47\mu\text{m}$.

TECHNIQUE	STARTING MATERIAL	PROCESS
Selective laser sintering	Duraform Powder, Nylon	Sintering in Sinterstation 2000 to form porous part e.g. smart card holder casing
Infiltration	polyurethane (PU) R-9639 from Neorez, USA	Soaking part in PU for 10 minutes
Smoothing	UV lacquer Stargloss GLA 2298	1. Apply onto prescribe surface using a brush. 2. Cure in UV chamber for 12 seconds
Spray painting	Tamiya black Semi-gloss	1. Spray three consecutive coating of paint using 0.3mm nozzle spray. 2. Dry paint under ambient conditions. 3. Spray vigorously at a distance of about 40-60cm. 4. Dry paint under ambient conditions.

5

TABLE 3

Table 4 below shows the process to achieve a MT-11004 texture according to the industrial standard from Mold Tech. The roughness (Rz) requirement of MT-11004 is $6.782\mu\text{m}\pm 10\%$. The roughness achieved

using the process described in Table 4 was 7.3 μ m. The Part produced looked exactly like the industrial standard.

TECHNIQUE	STARTING MATERIAL	PROCESS
Selective sintering laser	Duraform Powder Nylon	Sintering in Sinterstation 2000 to form porous part e.g. car alarm casing 25x30mm
Infiltration	polyurethane (PU) R9639 from Neorez, country?	Soaking part in PU for 10 minutes
Smoothing	UV lacquer Stargloss GLA2298	1. Apply onto prescribe surface using a brush. 2. Cure in [machine name] for 20 seconds
Spray painting	Tamiya black semi-gloss	1. Spray three consecutive coating of paint using 0.5mm nozzle spray. 2. Dry paint under ambient conditions.
Sand blasting	Aluminum oxide 60 mesh	Sand blast at 30-40psi for 20 seconds

TABLE 4

- 5 Table 5 shows the steps to provide a rapid prototype of a handphone cover with a high glossy, grey finish.

TECHNIQUE	STARTING MATERIAL	PROCESS
Selective sintering	Duraform Powder Nylon	Sintering in Sinterstation 2000 to form porous part
Infiltration	Neorez R9629 polyurethane (PU)	Soaking part in PU for 15 minutes
Smoothing	Stargloss GLA 2298 UV lacquer	Brushing onto prescribe surface and radiate in UV chamber for 15 seconds
Sanding	1. Sand paper grade 240 2. Sand paper grade 1200	1. Sand for 20 minutes 2. Sand for 10 minutes
Lacquer coating	Tamiya clear Lacquer	Spray at 30mm distance & allow to dry. Repeat spraying at 30mm distance & allow to dry.

TABLE 5

For non-porous plastics, the same process as described above may be used, except that the PU infiltration step may be omitted.

From the description and examples discussed above, it is appreciated that many variations in methods and products are possible based on the teachings disclosed herein. It is contemplated that many

changes and modifications may be made by one of ordinary skill in the art without departing from the spirit and the scope of the invention described.

CLAIMS

- 1 1. A method of treating a porous plastic object comprising :
 - 2 (a) removing surface porosity of said object;
 - 3 (b) smoothening said surface with a curable polymeric hardener; and
 - 4 (c) curing said hardener.
- 5 2. A method according to claim 1 further comprising :
 - 6 (d) sanding said surface to remove roughness.
- 7 3. A method according to claim 2 further comprising :
 - 8 (e) applying a layer of lacquer to obtain a glossy appearance.
- 9 4. A method according to claim 3 further comprising :
 - 10 (f) Colour printing on said surface by cubic printing, tampon printing
 - 11 or letter stanza transfer.
- 12 5. A method according to claim 3 further comprising :
 - 13 (f) Texturing said surface by spray painting.
- 14 6. A method according to claim 1 wherein said object is produced by
15 selective laser sintering of nylon powder.
- 16 7. A method according to claim 1 wherein step (a) is performed by
17 soaking said object in a first curable polymer having sufficiently low
18 viscosity to penetrate the pores of said object; and
19 curing said polymer.

- 20 8. A method according to claim 1 wherein said curable polymer in step
21 (b) is a UV-curable lacquer.
- 22 9. A method of treating a porous plastic rapid prototype having a rough
23 surface with miniature steps, said method comprising :
- 24 a) infiltrating the pores of said plastic object with a curable
25 polymer;
- 26 b) curing said polymer;
- 27 c) applying an external coating of a curable polymeric hardener,
28 said hardener having sufficient viscosity to remain on said
29 surface and to fill up said miniature steps to form a smooth
30 surface; and
- 31 d) curing said hardener.
- 32 10. A method according to claim 9 further comprising :
- 33 e) sanding said surface remove roughness.
- 34 11. A method according to claim 10 further comprising :
- 35 f) applying a layer of lacquer on said surface to obtain a glossy
36 appearance.
- 37 12. A method according to claim 11 further comprising :
- 38 f) performing Tampon printing, letter stanza transfer or cubic printing
39 on said surface.
- 40 13. A method according to claim 9 wherein said prototype is made from
41 nylon using selective laser sintering.
- 42 14. A plastic rapid prototype containing pores and miniature steps on
43 the surface, said pores infiltrated and sealed with a polymeric resin,

44 said miniature steps smoothened by a polymeric hardener whereby
45 further post-processing may be performed on said surface.

46 15. A rapid prototype according to claim 14 further comprising a coating
47 of high glossy lacquer over said hardener coating.

48 16. A rapid prototype according to claim 14 further comprising a coating
49 of paint over said coating of hardener.

50 17. A rapid prototype according to claim 15 further comprising a coating
51 of painting over said coating of high glossy lacquer.

52 18. A rapid prototype according to claim 16 wherein said paint coating is
53 textured.

54 19. A method of treating the surface of a plastic object comprising :

55 a) smoothening said surface with a curable polymeric hardener;
56 and

57 b) curing said hardener

58 20. A method according to claim 19 further comprising :

59 c) sanding said surface to remove roughness.

60 21. A method according to claim 20 further comprising :

61 d) applying a layer of lacquer to obtain a glossy appearance.

62 22. A plastic rapid prototype containing miniature steps on the surface,
63 said steps smoothened by a polymeric hardener whereby further
64 post-processing may be performed on said surface.

65 23. A rapid prototype according to claim 22 further comprising a coating
66 of high glossy lacquer over said hardener coating.

67 24. A rapid prototype according to claim 22 further comprising a coating
68 of high glossy lacquer over said hardener coating.

69 25. A rapid prototype according to claim 22 further comprising a coating
70 of paint over said coating of hardener.

71 26. A rapid prototype according to claim 25 wherein said coating of paint
72 is textured.

73

ABSTRACT**PLASTIC COMPONENTS WITH IMPROVED SURFACE
APPEARANCE AND METHOD OF MAKING THE SAME**

A method of treating the surface of a rough, plastic object to produce a high gloss, textured and/or coloured finish. A rapid prototype treated according to the present method assumes the appearance of an injection molded part, without the usual high costs associated with producing the injection mold. In one embodiment, first step involves of removing the pores in the porous part, at least at the outer layers of the part, followed by a smoothening process of filling the voids between the miniature steps with a hardener to give a smooth surface, on which further post-processing may be performed.

FIGURE 3

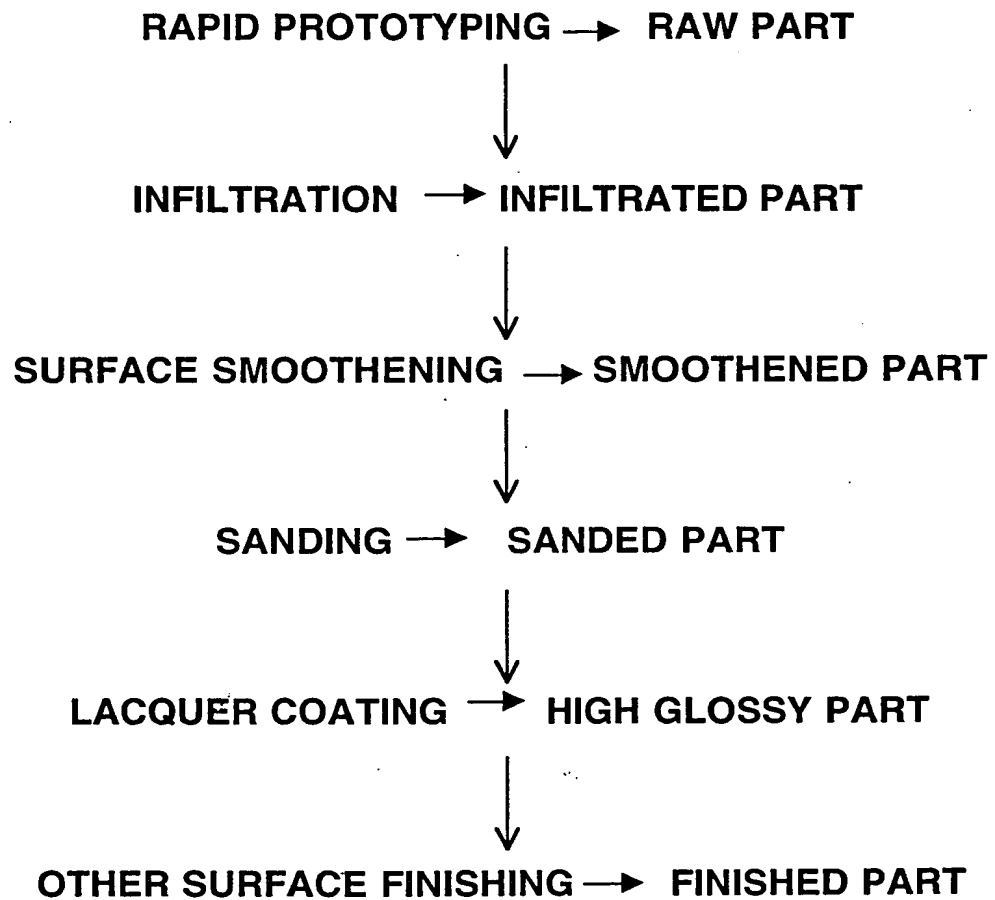


FIG. 1

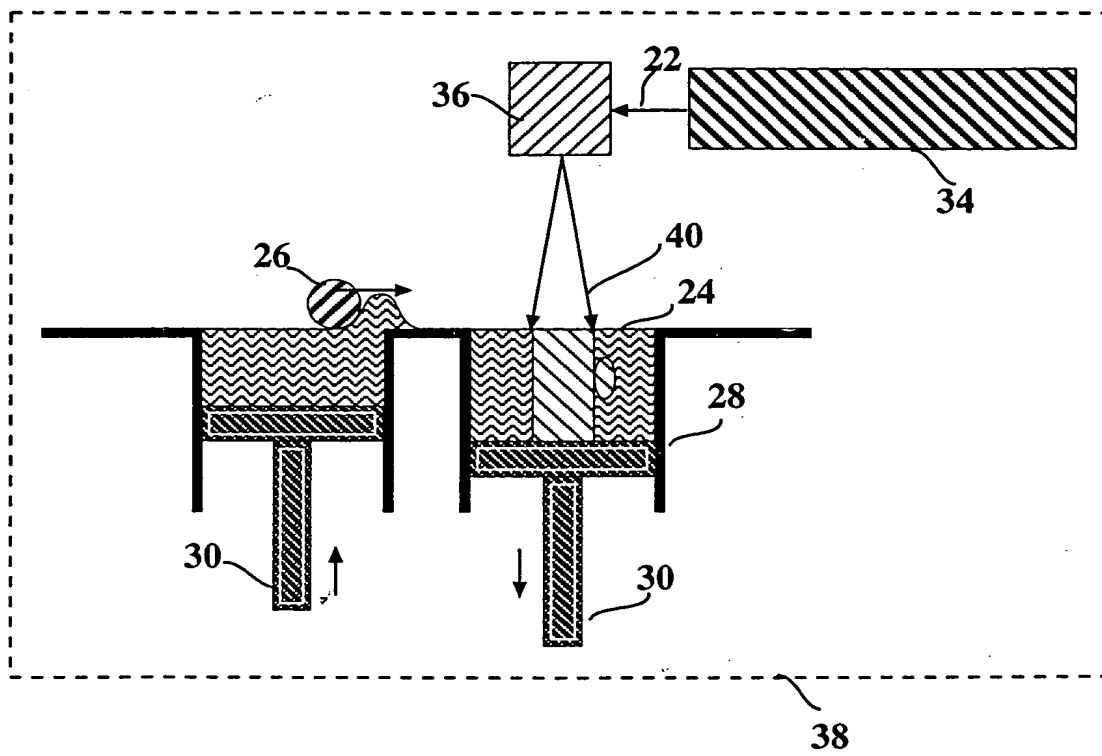


FIG. 2 (PRIOR ART)

3/3

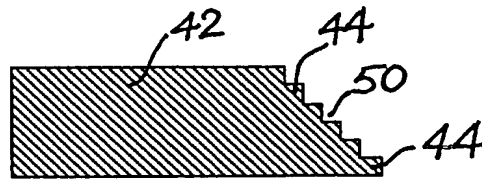


FIG. 3A

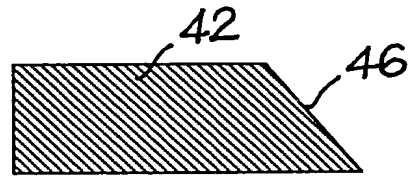


FIG. 3B

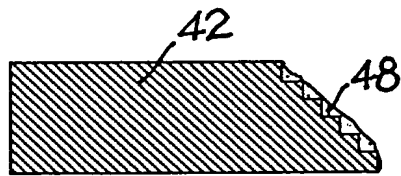


FIG. 3C